


LF Series Filter

Character

The filter can filter out the dirt, pipe scale, rust and condensation. It's used for special occasions, 5μm filter element can be easily replaced of 40μm standard filter element.

Graphics Sign



Ordering Code


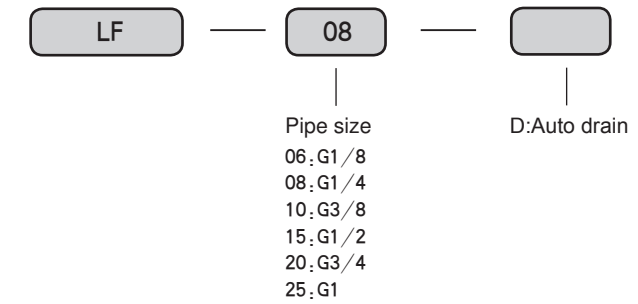


Figure Dimension

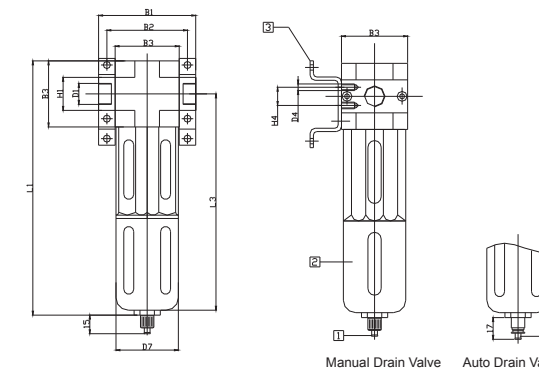

Type	B1	B2	B3	D1	D4	D7	H1	H4	L1	L3
LF-06	64	52	40	G1/8	M4	38	20	11	145	120
LF-08	64	52	40	G1/4	M4	38	20	11	145	120
LF-10	70	70	55	G3/8	M5	52	32	22	172	147
LF-15	85	70	55	G1/2	M5	52	32	22	172	147
LF-20	96	80	66	G3/4	M5	65	32	22	203	165
LF-25	136	91	66	G1	M5	65	40	22	203	165

Technical Parameter

Order	Type						
Filter element	Manual Drain Valve	LF-06	LF-08	LF-10	LF-15	LF-20	LF-25
	Auto Drain Valve	LF-06-D	LF-08-D	LF-10-D	LF-15-D	LF-20-D	LF-25-D
Applicable Medium		Air					
Applicable Medium		Sintered with water separator filter;					
Structural features		G1/8	G1/4	G3/8	G1/2	G3/4	G1
Connection size	LF-...-D-...(-A)	1000	1200	2700	3000	3800	4000
	Standard nominal flow rate	LF-...-D-5M...(-A)	600	950	1800	1900	3600
Working pressure	Manual Drain Valve	Max 1.6MPa					
	Auto Drain Valve	0.15 ~ 1.2MPa					
Filtration		40μm/5 μm					
Max limeset capacity		22ml		43ml		80ml	
Medium Temperature		0 ~ +60°C					