



Timer

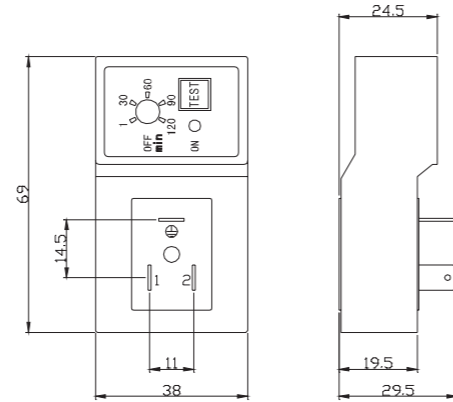

type : XY-720

type : XY-711

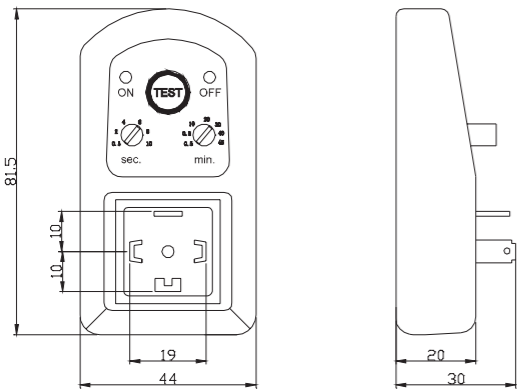

Item \ specification	XY-720	XY-711
Voltage	24...240V	AC/DC-50Hz/60Hz
Quiescent current	4mA Max	
Working temperature	-10° + 50°	
Protection grade	IP65-EN60529	
Switch sustaining voltage	400V Max	
Contact capacity	1A	
Instantaneous current	10A for 10ms	
Switch life	3 X 10 <sup>8</sup>	
Indicator	Yellow LED	
Connection type	DIN43650A	

Coil



Character

The coils produced by our company are in various types and specifications with handsome shape, reliable performance, long service life, low consumption of power, high and low temperature resistance, good fire resistance and high mechanical strength, it can meet the requirements of different pneumatic elements. They are multiple designed pressures for your choice. Special specifications can be made to order (AC12V~AC380V, DC6V~DC220V).

Type	Power	Picture	Figure Dimension	Suitable Type
TG2511CT-□	AC220V: 4VA DC24V: 2.6W			TG2511-06 TG2512-06
4V210CL-□	AC220V: 5VA DC24V: 4.8W			4V210-08, 4V310-10 4V410-15, TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C,
TG2521CL-□	AC220V: 5VA DC24V: 4.8W			TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C, FG2521-08 FG2522-08, FG2531-10 FG2532-10
TG2521CL-□ S S : Die Cast Coil	AC220V: 5VA DC24V: 4.8W			TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C, FG2521-08 FG2522-08, FG2531-10 FG2532-10