


TG series solenoid valve

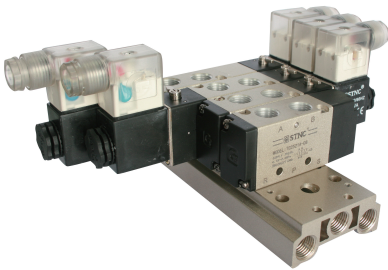

● Character

It is a pneumatic valve controlled by micro electric signal, with small dimension, large flow, handsome shape, reliable performance and long service life. It can be installed in the integration. It is an ideal directional control element, applicable to the electromechanical integration. There are multiple Specifications cations for your choice.

● Ordering Code

TG	25	1	1	06	C	AC220V
Series	Function	Connection Code	Control Form	Pipe size	Working mode	Standard voltage
23 : 2 positions/3 Ports	1 : 1/8	1 : Single solenoid operated	06 : G1/8	No mark : 2 positions	DC24V	
25 : 2 positions/5 Ports	2 : 1/4	2 : Double solenoid operated	08 : G1/4	C : Close center	AC110V	
35 : 3 positions/5 Ports	3 : 3/8		10 : G3/8	E : Release center	AC220V	
	4 : 1/2		15 : G1/2	P : Pressed Center		

■ Solenoid specifications

Allowable Voltage Range		±10%
Insulated Grade		Class B or Equivalent
Response Time		0.05 Sec
Power Consumption	AC	Start : 5.6VA, Keep on : 5.4VA
	DC	4W
Surge Voltage Suppressor		AC: Varistor, DC: Diode
Indicator Light		Neon Light, LED

● Maintenance Notice:

1. Be sure to check up the valve before installation.

2. Before installation, please confirm the voltage connection and airflow direction are right.

3. Notice to do dustproof. It's best to install a silencer or speed control silencer in the port of solenoid valve.

4. Metallic particle, dust and oil stain in pipes and fittings must be Eliminated before connected.

■ Technical Parameter

Item Specification	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Medium Temperature	Power
TG2311-06	2 Positions 3Ports	G1/8	4	Air	0.15 ~ 0.8 MPa	Internally Piloted	5 Cycles/Sec	Needless	-5 ~ 60℃	AC220V (4VA) DC24V (2.6W)
TG2511-06 TG2512-06	2 Positions 5 Ports		3.5		0.2 ~ 0.8MPa		3 Cycles/Sec			
TG3512-06C.E.P	3 Positions 5 Ports									
TG2321-08	2 Positions/ 3Ports	G1/4	4.5		0.15 ~ 0.8 MPa		5 Cycles/Sec			
TG2331-10		G3/8	6.5							
TG2341-15		G1/2	8							
TG2521-08 TG2522-08	2 Positions/ 5Ports	G1/4	4.5		0.15 ~ 0.8 MPa		5 Cycles/Sec			AC220V (5VA) DC24V (4.8W)
TG2531-10 TG2532-10		G3/8	6.5							
TG2541-15 TG2542-15		G1/2	8							
TG3522-08C.E.P	3 Positions/ 5Ports	G1/4	4		0.2 ~ 0.8 MPa		3 Cycles/Sec			
TG3532-10C.E.P		G3/8	5							
TG3542-15C.E.P		G1/2	6.5							



TG Series Solenoid Valve

2 Positions/5 Ports Solenoid Valve





● TG2511-06 ● TG2512-06


● TG2511-06



● TG2512-06


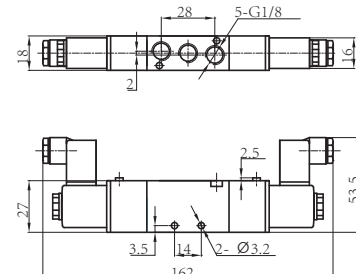


2 Positions/3 Ports Solenoid Valve


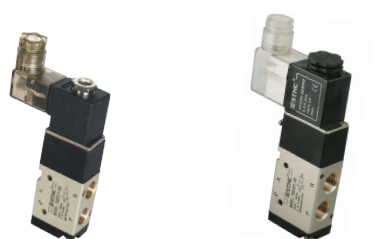


● TG2311-06 ● TG2321-08

● TG2311-06



● TG2321-08





2 Positions/3 Ports Solenoid Valve





● TG2331-10 ● TG2341-15

● TG2331-10



● TG2341-15





TG Series Solenoid Valve

2 Positions/5 Ports Solenoid Valve





● TG2521-08
TG2521-06 ● TG2522-08
TG2522-06

● TG2521-08





● TG2522-08


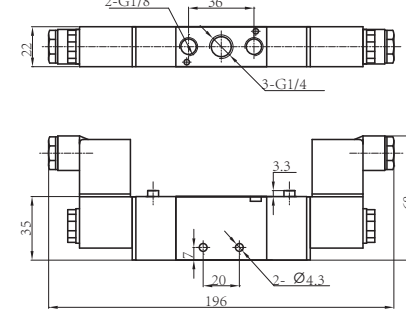


● TG2531-10
TG2531-08 ● TG2532-10
TG2532-08



● TG2531-10





● TG2532-10

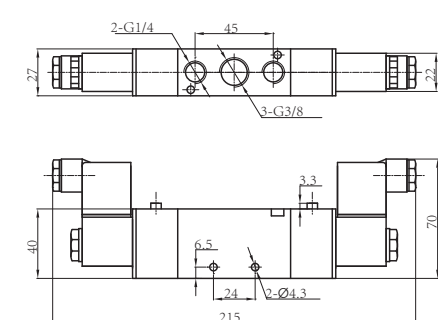

● TG2541-15





● TG2542-15

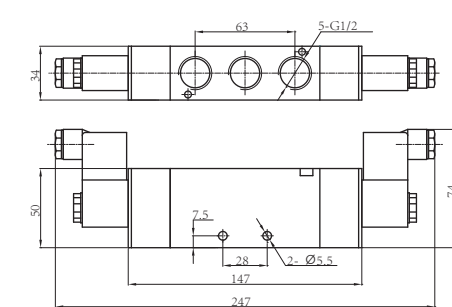


● TG2541-15 ● TG2542-15

TG Series Solenoid Valve



3 Positions/5 Ports Solenoid Valve

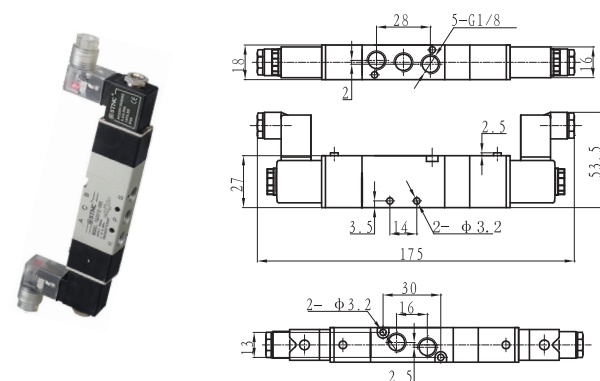



● TG3512-06C ● TG3512-06E ● TG3512-06P

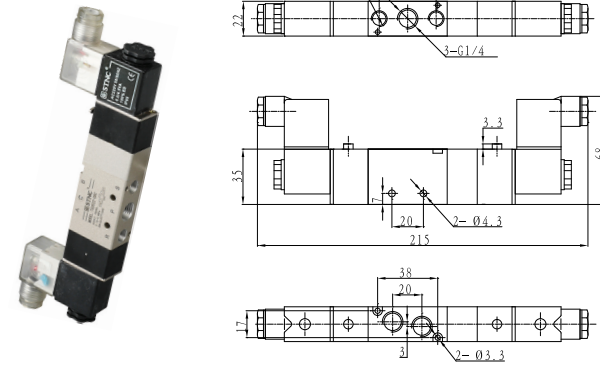

● TG3522-08C ● TG3522-08E ● TG3522-08P

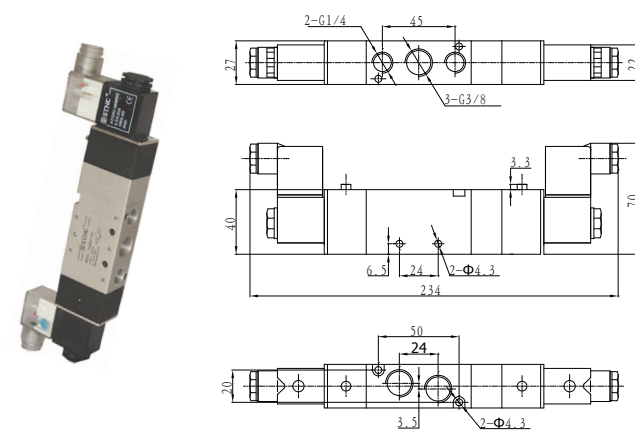

● TG3532-10C ● TG3532-10E ● TG3532-10P

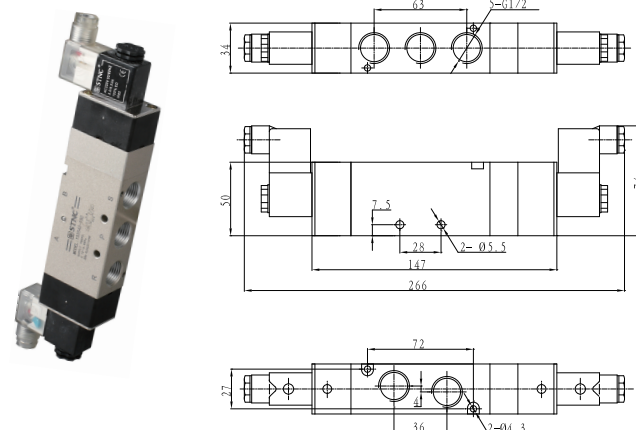

● TG3542-15C ● TG3542-15E ● TG3542-15P

TG Series Namur Solenoid Valve

2 Positions/5 Ports Namur Solenoid Valve



● TG2521-06M ● TG2522-06M ● TG2531-08M ● TG2532-08M ● TG2541-10M ● TG2542-10M
● TG2521-08M ● TG2522-08M ● TG2531-10M ● TG2532-10M ● TG2541-15M ● TG2542-15M


Ordering Code

TG	25	2	1	08	M	AC220V
Series	Function 25 : 2 Positions/5Ports	Connection Code 2 : 1/4 3 : 3/8 4 : 1/2	Control Form 1 : Single Solenoid Operated 2 : Double Solenoid Operated	Pipe Size 08 : G1/4 10 : G3/8 15 : G1/2	Installation Way M : Namur Solenoid Valve	Standard Voltage DC24V AC110V AC220V

Technical Parameter

Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Medium Temperature	Power
TG2521-06M TG2522-06M	2 Positions / 5Ports	G1/8	4	Air	0.15 ~ 0.8 MPa	Internally Piloted	5 Cycles/Sec	Needless	-5 ~ 60°C	AC220V : 5VA DC24V : 4.8W
TG2521-08M TG2522-08M		G1/4	4.5							
TG2531-08M TG2532-08M		G1/4	4.5							
TG2531-10M TG2532-10M		G3/8	6.5							
TG2541-10M TG2542-10M		G3/8	6.5							
TG2542-15M TG2542-15M		G1/2	8							

Figure Dimension

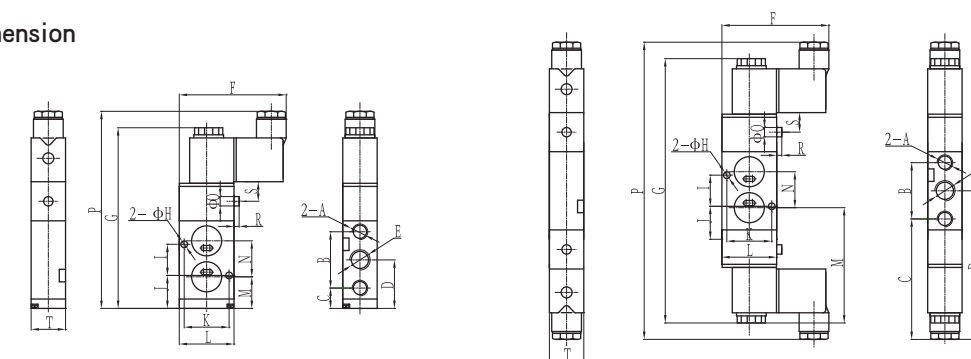

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S	T
TG2521-06M/08M	G1/8/G1/4	36	13.7	31.7	G1/4	66.5	119	4.3	20	21.7	29	35	20.2	23	130	4	1	11	22
TG2522-06M/08M	G1/8/G1/4	36	67	85	G1/4	66.5	176	4.3	20	75	29	35	73.5	23	196	4	1	11	22
TG2531-08M/10M	G1/4/G3/8	45	17	39.5	G3/8	69	138	5.2	24	27.5	32	40	29	24	145	4	1	11	27
TG2532-08M/10M	G1/4/G3/8	45	72	94.5	G3/8	69	195	5.2	24	83.75	32	40	82.5	24	215	4	1	11	27
TG2541-10M/15M	G3/8/G1/2	63	22.5	52	G1/2	75	166	5.5	32	38	42	50	35.5	37	178	4	1	11	34
TG2542-10M/15M	G3/8/G1/2	63	77	112.5	G1/2	75	225	5.5	32	94.5	42	50	92	37	247	4	1	11	34