

Timer

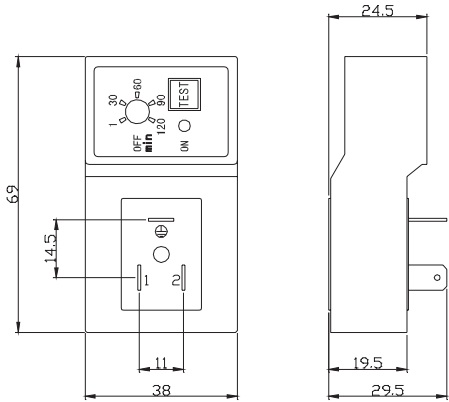
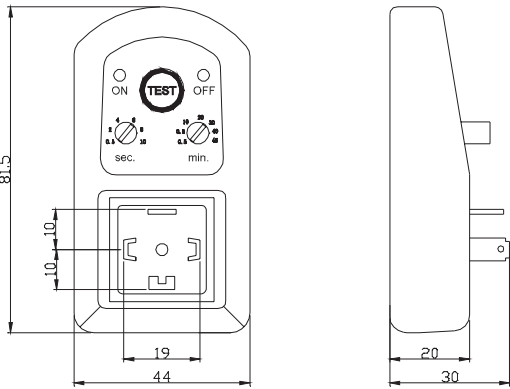
Coil



type : XY-720



type : XY-711



Item\specification	XY-720	XY-711
Voltage	24...240V	AC/DC-50Hz/60Hz
Quiescent current	4mA	Max
Working temperature	-10°	+ 50°
Protection grade	IP65-EN60529	
Switch sustaining voltage	400V	Max
Contact capacity	1A	
Instantaneous current	10A	for 10ms
Switch life	3 X 10 ⁸	
Indicator	Yellow	LED
Connection type	DIN43650A	








● Character








The coils produced by our company are in various types and specifications with handsome shape, reliable performance, long service life, low consumption of power, high and low temperature resistance, good fire resistance and high mechanical strength, it can meet the requirements of different pneumatic elements. They are multiple designed pressures for your choice. Special specifications can be made to order (AC12V~AC380V, DC6V~DC220V).

Type	Power	Picture	Figure Dimension	Suitable Type
TG2511CT-□	AC220V:4VA DC24V:2.6W			TG2511-06 TG2512-06
4V210CL-□	AC220V:5VA DC24V:4.8W			4V210-08, 4V310-10 4V410-15, TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C,
TG2521CL-□	AC220V:5VA DC24V:4.8W			
TG2521CL-□ S S : Die Cast Coil	AC220V:5VA DC24V:4.8W			TG2321-08 TG2331-10, TG2521-08 TG2522-08T, G2531-10 TG2532-10T, G2541-15 TG2542-15T, G2521-06 TG2521-08M, TG3522-08C TG3532-10C, FG2521-08 FG2522-08, FG2531-10 FG2532-10

Coil

Type	Power	Picture	Figure Dimension	Suitable Type
TM-06C- □	DC24V : 5.5W DC12V : 5.7W			TM-06
TM-08C- □	AC220V : 3.7VA DC24V : 7W DC12V : 6.1W			TM-08
VT307C- □	AC220V : 3.7VA DC24V : 5.4W			VT307
ZDZ / ZDXC- □	DC24V : 2W			ZDZ23-08 / 04 ZDX23-08 / 06
PKC □	AC220V : 13VA DC24V : 9W			TD-08 TD-10 TD-15 PK-06 PK-08

Coil

Type	Power	Picture	Figure Dimension	Suitable Type
UX23-2LC- □	AC220V : 10VA DC24V : 9W			UX22-2L, UX23-2L
UD-8C- □	AC220V : 9VA DC24V : 11W			UZ-B-06, UZ-B-08 UZ-B-10 UZ-C-06, UZ-C-08 UZ-C-10 UD-8, UD-6 UF-06, UF-08, UF-10 UW-C-06, UW-C-08 UW-C-10
UW-25C- □	AC220V : 12VA DC24V : 20W			UW-25, UW-20, UW-15, UW-10, UD-10
USC- □	AC220V : 20VA DC24V : 44W			US-10, US-15, US-20, US-25, US-35, US-40, US-50, UW-35, UW-40, UW-50
TUWC	AC220V : 12.5W DC24V : 22.5W			TUW-10, TUW-15 TUW-25, TWS-10 TWS-15, TWS-20 TWS-25, UWK-15 UWK-20, UWK-25
TUSC	AC220V : 20W DC24V : 30W			TUS-10, TUS-15, TUS-20 TUS-25, TUS-35, TUS-40 TUS-50, TUW-35, TUW-40 TUW-50, TWS-35, TWS-40 TWS-50