


Pressure Gauge

● Ordering Code




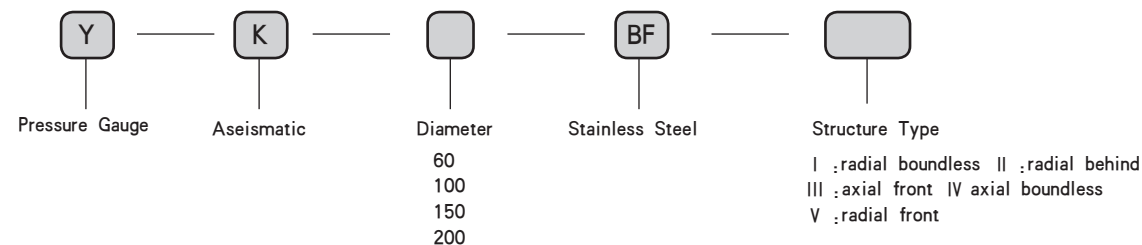


■ Technical Parameter

Type	Y25	Y30	Y40	Y50	Y60	YK60	Y100	YK100
Diameter	φ 25	φ 30	φ 04	φ 50	φ 60		φ 100	
Pipe Thread	G1/16	G1/8		G1/4	M14x1.5		M20x1.5	
Precision	2.5						1.5	
Measure MPa	0 ~ 0.25, 0 ~ 0.4, 0 ~ 1.0, 0 ~ 1.6, 0 ~ 2.5, 0 ~ 4				0 ~ 1, 0 ~ 1.6, 0 ~ 2.5, 0 ~ 4, 0 ~ 6, 0 ~ 10, 0 ~ 16, 0 ~ 25			
Aseismatic Grade	V.H.4							
Environment Temperature					-40 ~ 70℃			


Note: The thread type could be made to order

- Feature: smart action, a variety of installation, various pressure ranges, easy to use. Production of high precision.

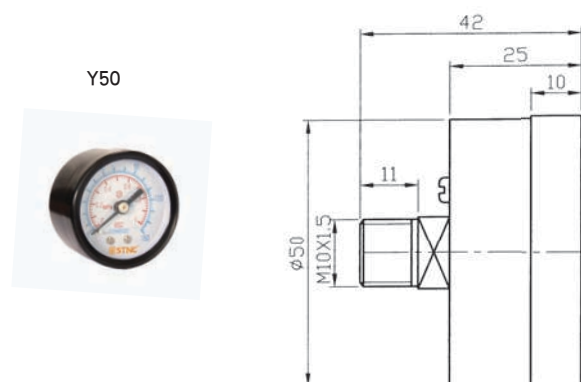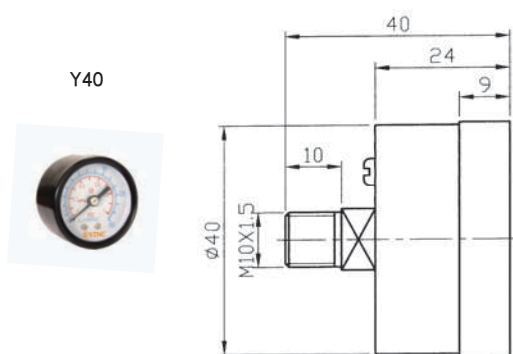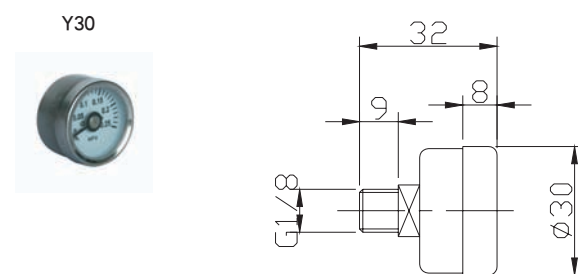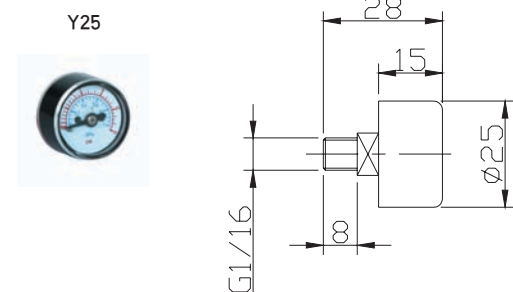

Pressure Gauge


YBF60 Steel Barrel Pressure Gauge

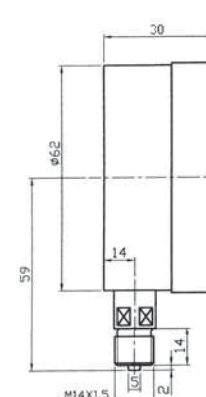


YK60 Aseismatic Pressure Gauge



YBF100 Steel Barrel Pressure Gauge

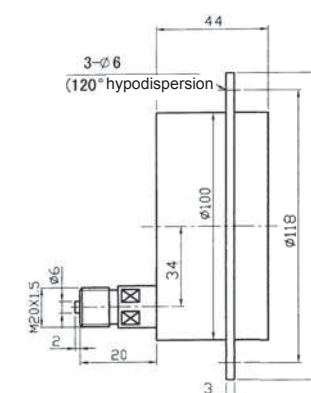

YK100 Aseismatic Pressure Gauge

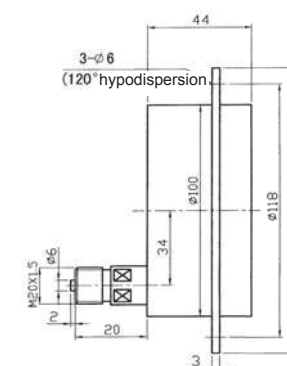

Special Oil For Lubricator

■ Specific Property

- 一、Mail Application :
Turbine oil 1# (ISOVG32) suitable for Pneumatic equipments. Could play a role for lubrication, rust-protection and improved service life for mechanical components and seals.
- 二、Summary of performance :
The oil is a good lubricator for pneumatic systems which in low viscosity. It is refined by modern scientific methods with refined mineral oil, anti-wear agent, preservatives, anti-oxidants, anti-foaming agent, electrostatic agent and imported high quality additives and so on.
- 三、Viscosity range: 32mm²/s(=CST)
- 四、Standard : ISOVG32



TL-04
(Capacity : 4L)

TL-01
(Capacity : 1L)