


Mechanical Valve

● Ordering Code

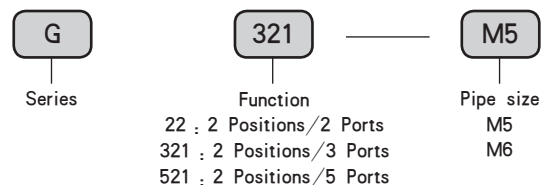


● Character

Product design, compact, good looks, with the operating force, easy to use and so on. Pneumatic devices were widely used in control devices.

■ Technical Parameter


Item \ Specification	G22-M5	G321-M5	G521-M5
Medium Temperature	-5 ~ 60°C		
Pressure Range	0 ~ 1.0 MPa		
Lubrication	Needless		
Pipe Size	M5		
Control Form	Hand		
Applicable Medium	Air		
Function	Brass		
Material of body	2 Positions/2 Ports	2 Positions/3 Ports	2 Positions/5 Ports

2 Positions/2 Ports



● G22-M5

● G22-M5




2 Positions/3 Ports




● G321-M5

● G321-M5

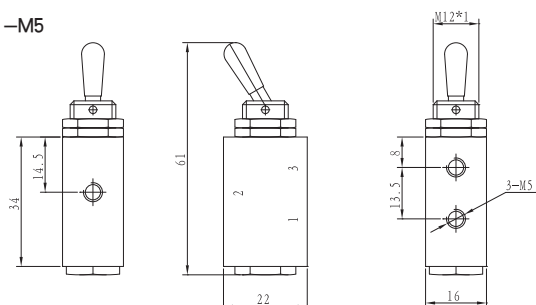


2 Positions/5 Ports




● G521-M5

● G521-M5

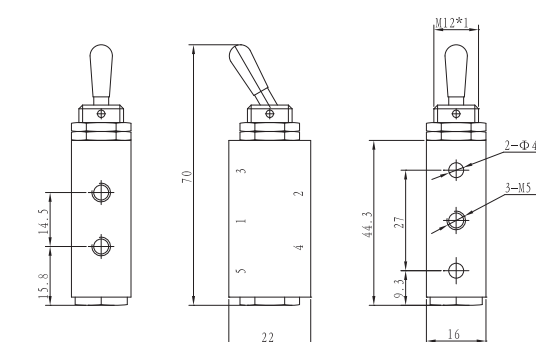

● Ordering Code

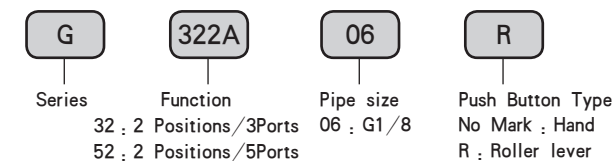

G series Manually Valve/Mechanical Valve

● Character

Product design, compact, good looks, with the operating force, easy to use and so on. Pneumatic devices were widely used in control devices.


■ Technical Parameter

Item \ Specification	Function	Pipe size	Nominal Diameter (mm)	Applicable Medium	Pressure Range	Operating Method	Lubrication	Medium Temperature
G322A-06	2 Positions/3Ports	G1/8	6	Compress Air Inert gas	0 ~ 1.0MPa	Hand	Needless	-5 ~ 60°C
G322A-06R		G1/8	6			Roller lever		
G522A-06	2 Positions/5Ports	G1/8	6			Hand		
G522A-06R		G1/8	6			Roller lever		

2 Positions/3 Ports Manually Valve/Mechanical Valve




● G322A ● G322A-06 ● G322A-06R

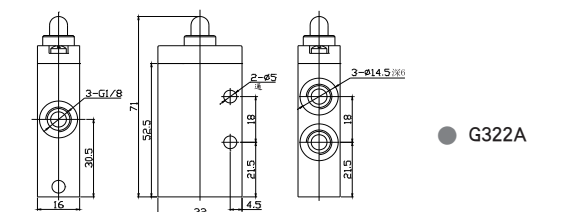


● G322A

● G322A-06

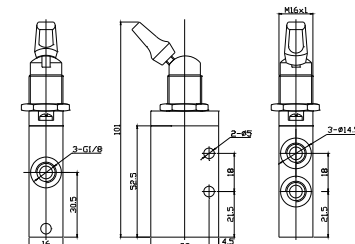


● G322A-06R

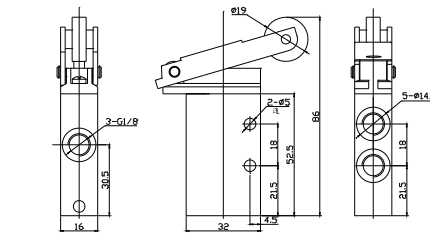

2 Positions/5 Ports Manually Valve/Mechanical Valve




● G522A ● G522A-06 ● G522A-06R

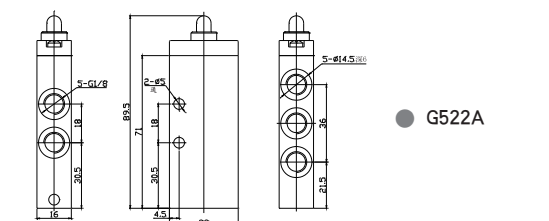


● G522A

● G522A-06



● G522A-06R

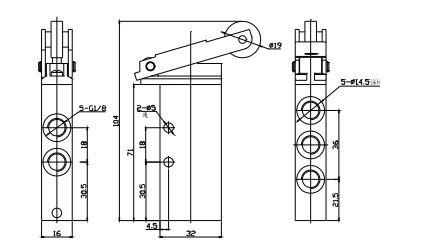


2 Positions/3 Ports Mechanical Valve



Technical Parameter

Specification	G321R、PP、PPL、PB、EB、TB、LB
Applicable Medium	Air
Pressure Range	0 ~ 1.0MPa
Control Method	Mechanical Control、Manually Control
Lubrication	Needless
Medium Temperature	-5 ~ 60°C
The Button's Standard Color	black : LB red : PP,PPL,PB,EB,TB
The Button's Color Available	green, black : PP,PPL,PB,TB

Ordering Code

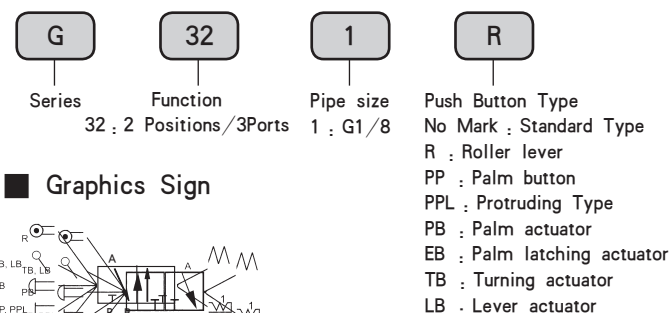

Graphics Sign





Figure Dimension




2 Positions/3 Ports Mechanical Valve

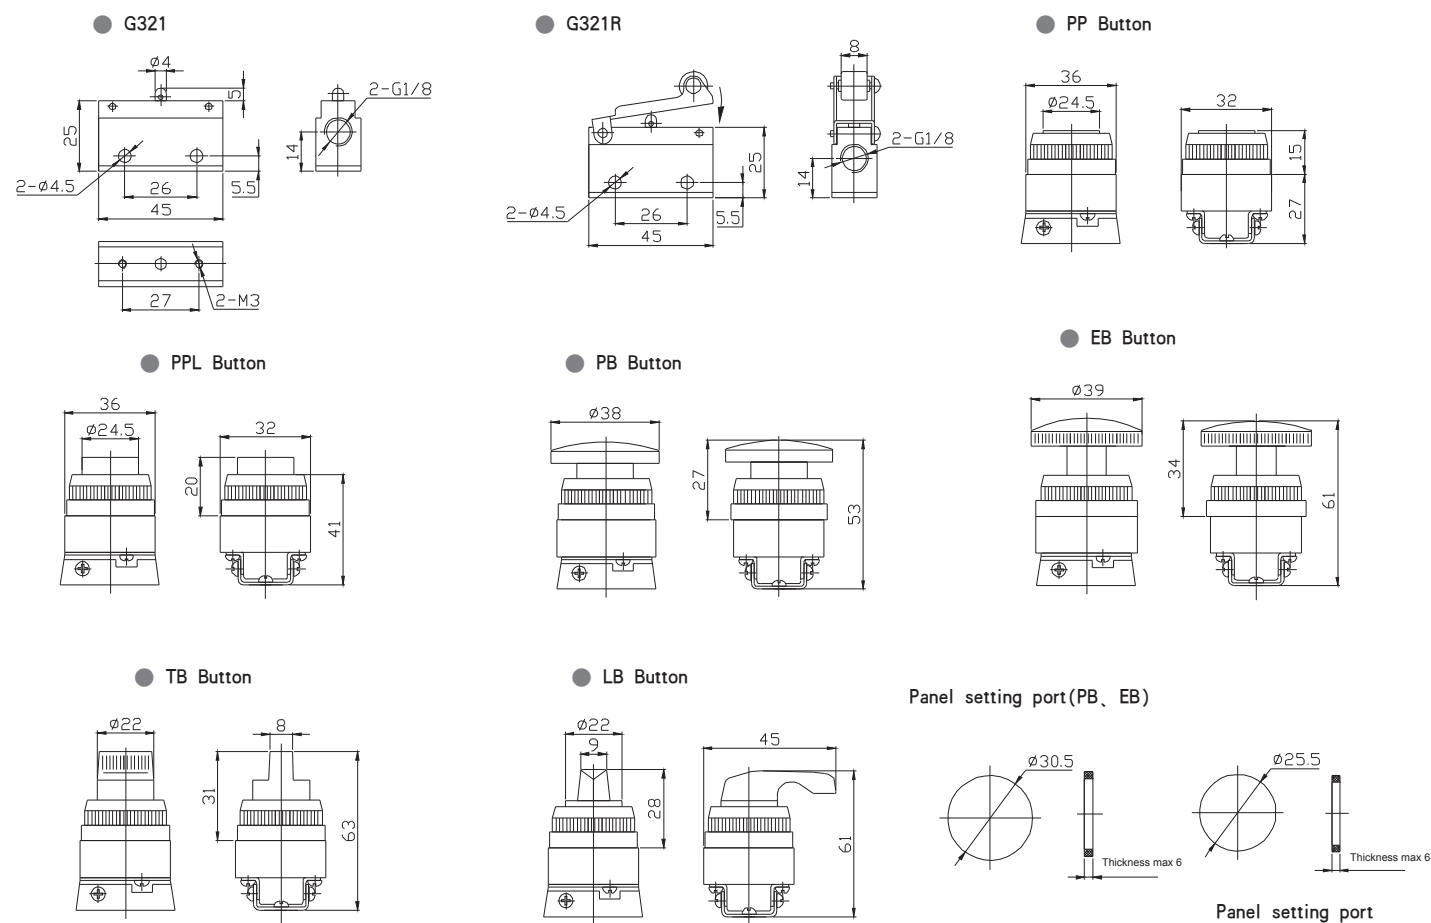

Technical Parameter

Specification	G322R、PP、PPL、PB、EB、TB、LB
Applicable Medium	Air
Pressure Range	0 ~ 1.0MPa
Control Method	Mechanical Control、Manually Control
Lubrication	Needless
Medium Temperature	-5 ~ 60°C
The Button's Standard Color	black : LB red : PP,PPL,PB,EB,TB
The Button's Color Available	green, black : PP,PPL,PB,TB

Ordering Code

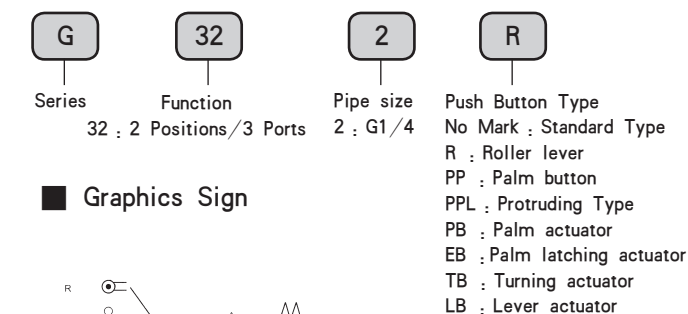

Graphics Sign





Figure Dimension



MCS Mechanical Valve

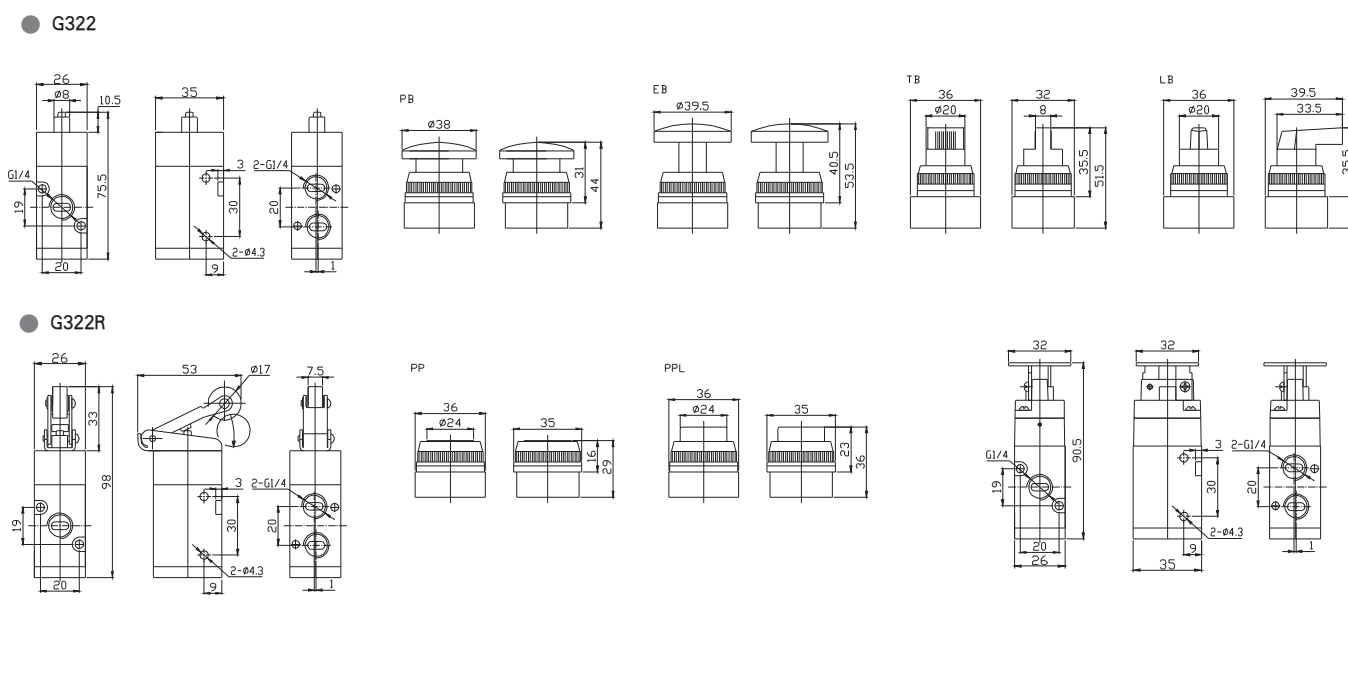

● MCS4 ● MCS4-R

Series The pipe port size Roller lever

G	52	2	R
Series	Function	Pipe size	Push Button Type
52 : 2	Positions/5Ports	2 : G1/4	No Mark : Standard Type
			R : Roller lever
			PP : Palm button
			PPL : Protruding Type
			PB : Palm actuator
			EB : Palm latching actuator
			TB : Turning actuator
			LB : Lever actuator

Item Specification	Applicable Medium	Applicable Pressure Range	Control Method	Lubrication	Medium Temperature
MCS4	Air	0 ~ 0.8MPa	Manually Control	Needless	-5 ~ 60℃
MCS4-R					

[illegible][illegible]