



TD Series Solenoid Valve

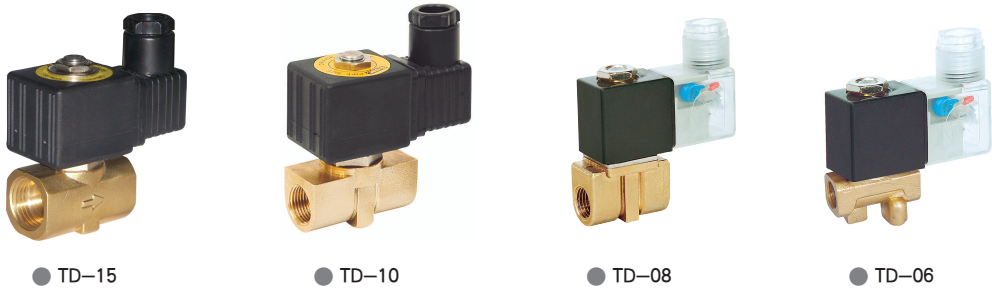

Graphics Sign



Ordering Code

TD	06	AC220V
Series	Pipe size 06 : G1/8 08 : G1/4 10 : G3/8 15 : G1/2	Standard Voltage AC220V AC110V DC24V


Specific Property

This valve has direct action type piston and quick action, with multiple purposes, high efficiency, long service life, good waterproof performance, multiple wiring directions and handsome shape.

Technical Parameter

Item\ Specification	TD-06	TD-08	TD-10	TD-15
Material of Body	Brass			
Control Method	Direct Action Type			
Pipe Size	G1/8	G1/4	G3/8	G1/2
Nominal Diameter(mm)	2	2	3	3
Pressure Range	0 ~ 1.0MPa			
Applicable Medium	Air	Water	Oil	
Medium Temperature	-10 ~ 60℃	1 ~ 60℃	-5 ~ 60℃	
Specified Voltage	AC24V、AC36V、AC110V、AC220V、DC24V、DC110V			
Operating Voltage Range	±10%			
Min. Activating Time	0.05S			
Power	AC220V : 4.8VA、DC24V:5W		AC220V : 13VA、DC24V:9W	

Figure Dimension

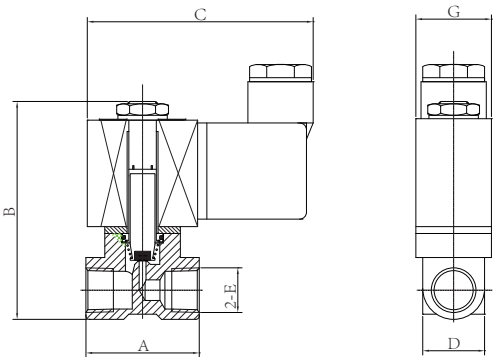

Specification	A	B	C	D	E	G
TD-06	33	65	65	18	G1/8	22
TD-08	33	65	65	18	G1/4	22
TD-10	49	68	78	23	G3/8	34
TD-15	54	69	80	25	G1/2	34